

IM-1550-40-PM-HER



1550 nm, 40 GHz Analog Modulator w/ PM Output, High Extinction Ratio

The Optilab IM-1550-40-PM-HER Intensity Modulator is designed for analog modulation of up to 40 GHz for microwave links, antennae remoting, and RF over Fiber. It is a high linearity, low driving voltage lithium niobate mach zehnder interferometer (MZI) design. It is a hands-on bias-stabilized lithium modulator that proves to be extremely stable for long periods of time, and features excellent stability in a biased circuit, operating from 1525 nm to 1610 nm. It has an excellent operating temperature tolerance ranging from -30 °C to +75 °C, and its low insertion loss provides for its maximum transmission power. The IM-1550-40-PM-HER uses a Polarization Maintaining (PM) input and output fiber, and features separate RF and bias ports. Contact Optilab for more information.


Features

- S_{21} 3dB bandwidth \geq 30 GHz
- Excellent stability in a biased circuit
- Low Drive Voltage of 4.5 volt
- 1525 nm to 1610 nm range wavelength
- Zero chirp design
- Low insertion loss, < 4.0 dB
- Built in photodiode
- Integrated polarizer
- **High Extinction Ratio, >30 dB**

Applications

- 40 GHz RFoF over Fiber
- Antenna Remoting
- High Frequency Fiber Optic Links
- Delay Lines Telemetry Systems
- Instrumentation
- Microwave Link
- Active mode laser

Functional Diagram

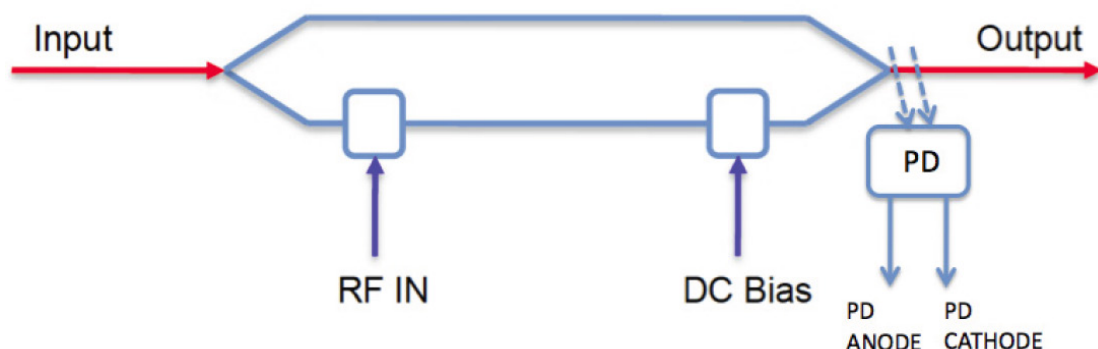

1550 nm, 40 GHz Analog Modulator w/ PM Output, High Extinction Ratio

OPTIONS

IM-1550-40-PM-HER-XX-y

XX TQ: Temperature
Qualified -55 °C to +80 °C
Connector Type:
y a, FC/APC;
u, FC/UPC

TECHNICAL INFO

For technical info and support:

sales@optilab.com

www.optilab.com

WEB ORDER

To order, please visit OEQuest.com.




Optilab Advantage

- Innovation
- Performance
- Quality
- Customization
- Warranty



General Specifications	
Input optical power	100 mW max.available
Operating wavelength	1525 to 1610 nm
Chirp Value	<± 0.2 (zero chirp design)
Insertion Loss	< 4.5 dB
Extinction Ratio	30 dB min.
Optical return loss	≤ -45 dB
S ₂₁ Bandwidth (RF Port)	> 30 GHz
S ₁₁ Return Loss (RF Port)	≤ -10 dB @ 30 GHz
V _π (RF Port)	≤ 4.5 V typ. @ 1 KHz
Input RF power	27 dBm max.
Impedance (RF Port)	50 Ω typ.
S21 Bandwidth (Bias Port)	500 MHz typ.
V _π (Bias Port)	≤ 5 V @ 1 KHz
Impedance (Bias Port)	>1 MΩ
PD Responsivity	0.001 A/W typ.
Analog Link Performance	
IIP3 @7 GHz	29 dBm typ.
1 dB Compression Point @10 GHz	15.5 dBm typ.
Mechanical Specifications	
Operating Temperature	Standard range: -30 °C to +75 °C; Extended range: -55 °C to +80 °C (optional)
Storing Temperature	-60 °C to +85 °C
Operating Humidity	0% to 90% Relative Humidity
Input Fiber Type	PANDA - PM 1550
Output Fiber Type	PANDA - PM 1550
Input Connector	PM FC/APC or PM FC/UPC
Output Connector	PM FC/APC or PM FC/UPC
Material	LiNbO3
Crystal Orientation	X-cut, y-propagating
Waveguide Process	Ti-indiffused
Bias Port Connector	2 PINS
TAP PD Connector	2 PINS
RF Port connectors	V Connector
Cabling	900 μm tubing
Dimensions (including boots)	5.00" x 0.60" x 0.40"

1550 nm, 40 GHz Analog Modulator w/ PM Output, High Extinction Ratio

Typical S21 and S11 Bandwidth

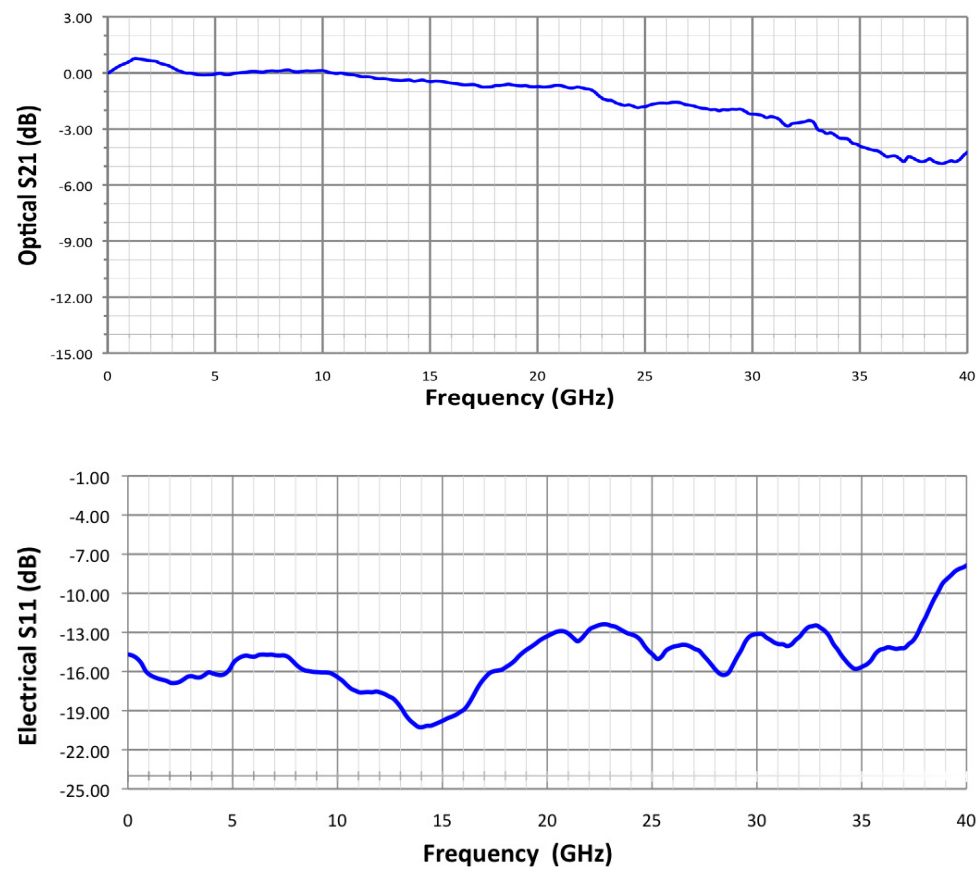

Mechanical Drawing

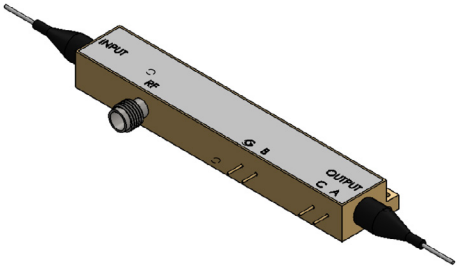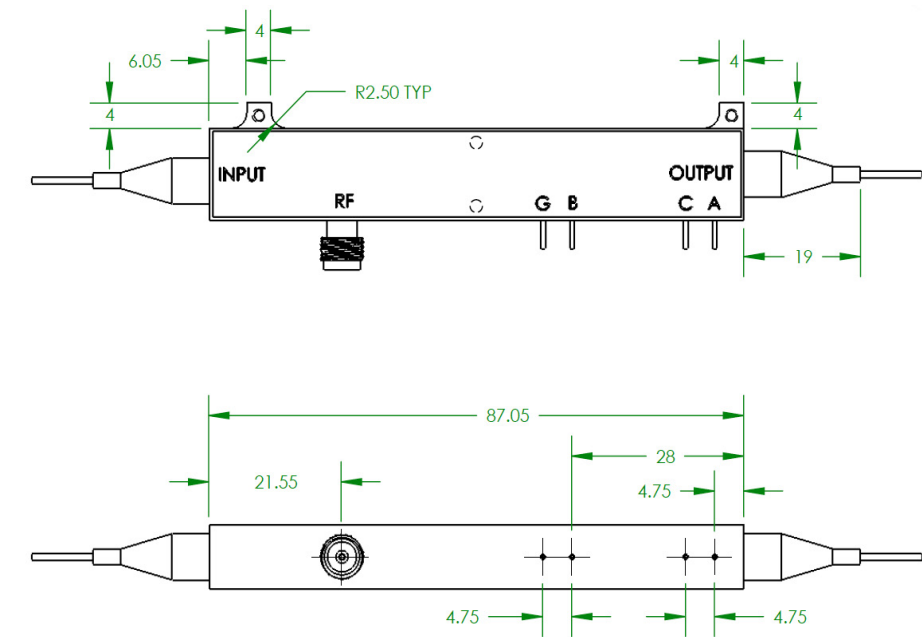

Pin #	Description
G	GND
B	DC BIAS
A	PD ANODE
C	PD CATHODE

* Dimension unit: mm