


REV	DESCRIPTION	ENG. BY	DATE
A	The first release	Jianzheng Zhu	2017-04-11

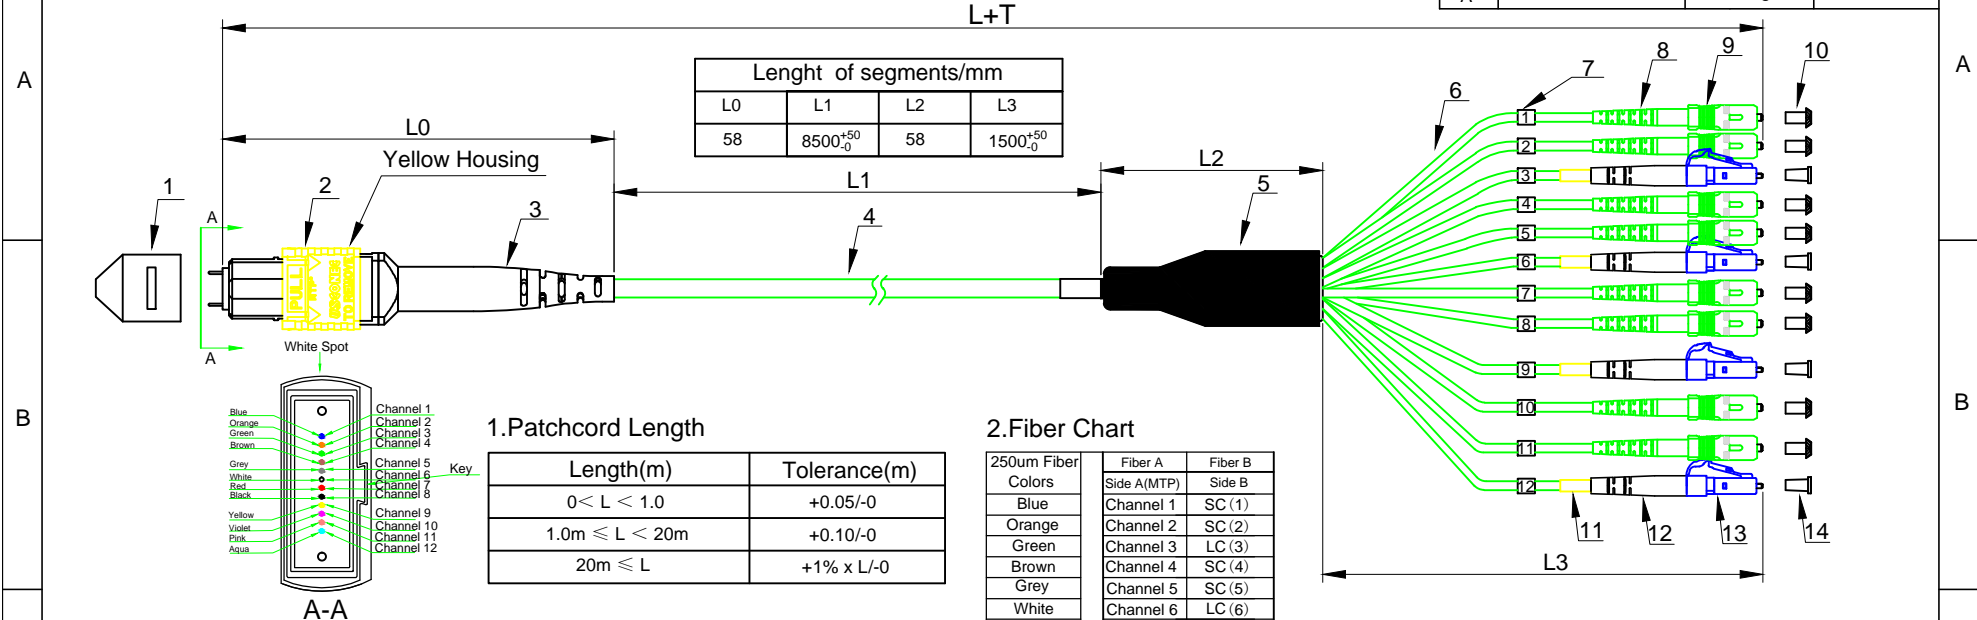

14	LC Dust Cap (White)	4
13	LC/UPC Connector SM Simplex 2.0mm (Blue)	4
12	LC Boot (White)	4
11	LC Yellow Heatshrink Tube with Crimping	4
10	SC Dust Cap (Clear)	8
9	SC/APC Connector SM Simplex 2.0mm (Green)	8
8	SC 2.0mm Boot (Green)	8
7	Label (1-12)	12
6	Ø2.0mm Simplex Fanout tube LSZH (Green)	XXm
5	Fan Out (Black)	1
4	SM G652D 12Cores 250um OD3.0mm LSZH Cable (Green)	XXm
3	MTP 3.0mm Boot (Black)	1
2	MTP/APC Male Low Loss Connector SM 12 Cores 3.0mm (Yellow)	1
1	MTP Dust Cap (Black)	1
ITEM	DESCRIPTION	Q'TY

**3. Connector Test Specifications**

Parameters	MTP/APC	LC/UPC	SC/APC
Insertion Loss	≤0.30dB	≤0.30dB	≤0.20dB
Return Loss	≥60.0dB	≥50.0dB	≥60.0dB
Operating Temperature	-40℃~75℃		
Storage Temperature	-40℃~85℃		

**HJ3·W Inc**

D/N.	SSP-MTP(M)-8SCA-4LC-S3-10-2GN	Rev.
DRAWN BY	Jianzheng Zhu	A
CHECK BY	Ming Li	SPEC.
APPD. BY	Aiqing Li	Patchcord: MTP/APC(M)-SC/APC-LC/UPC SM G652D 12 Cores 250um OD3.0mm LSZH Green L=10.2M
CUSTOMER		SHEET
DWG. NO.		SCALE
		UNIT: mm
		DATE
		VIEW