


REV	DESCRIPTION	ENG.BY	DATE
A	The first release	Jianzheng Zhu	2017-04-11

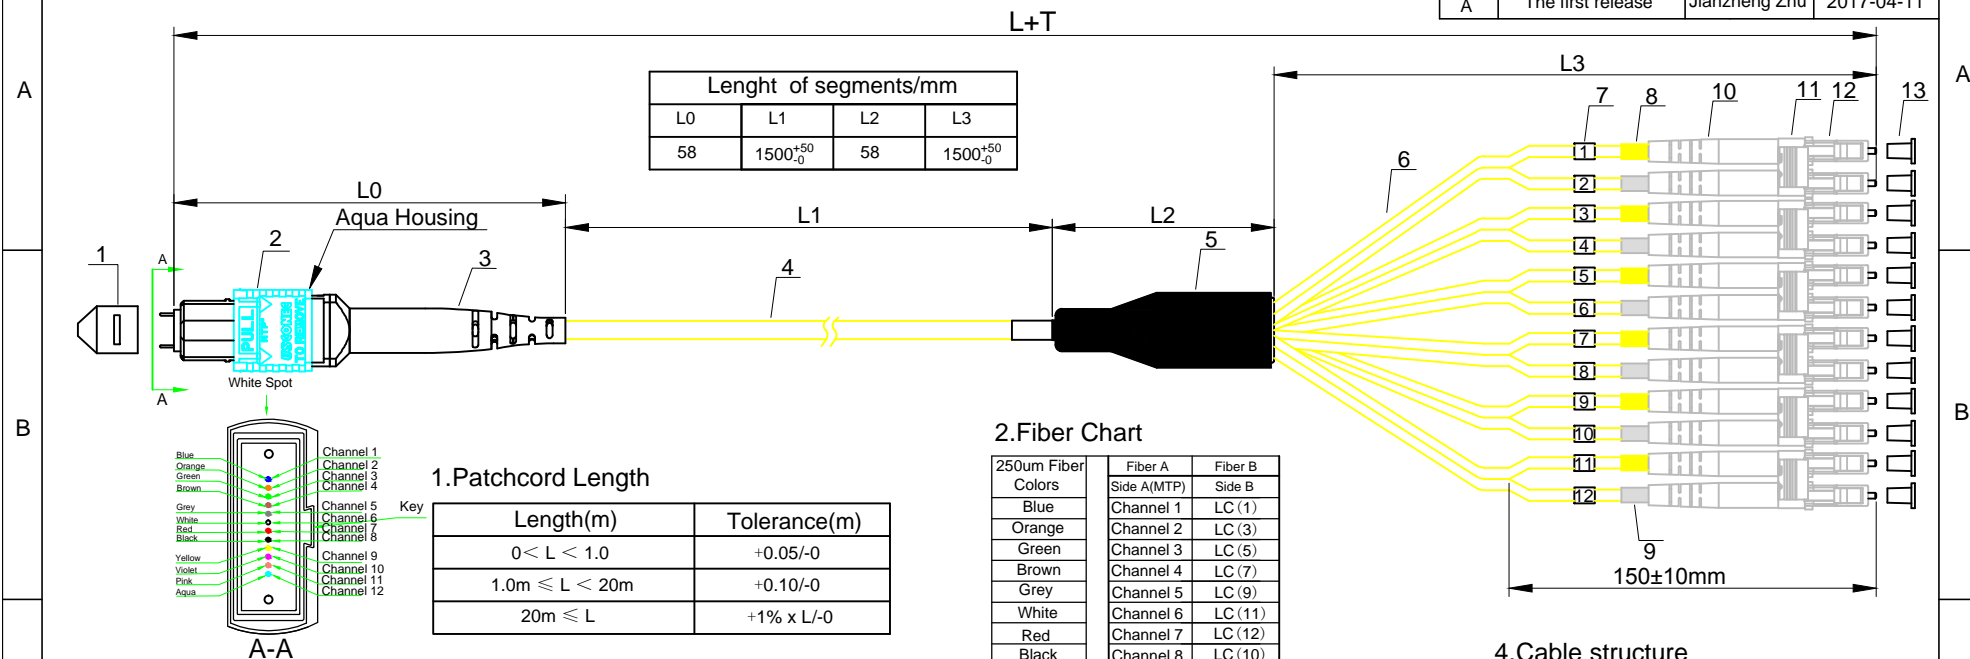

13	LC Dust Cap (White)	12
12	LC/UPC Connector MM Duplex 2.0mm (Beige)	6
11	LC Duplex Clip (Beige)	6
10	LC Boot (Beige)	12
9	LC White Heatshrink Tube with Crimping	6
8	LC Yellow Heatshrink Tube with Crimping	6
7	Label (1-12)	12
6	Ø2.0mm Duplex Fanout tube LSZH (Yellow)	XXm
5	Fan Out (Black)	1
4	MM OM3 12Cores 250um OD3.0mm LSZH Cable (Yellow)	XXm
3	MTP 3.0mm Boot (Black)	1
2	MTP/PC Male Connector MM 12 Cores 3.0mm (Aqua)	1
1	MTP Dust Cap (Black)	1
ITEM	DESCRIPTION	Q'TY

### 3.Connector Test Specifications

Paramerers	MTP/PC	LC/UPC
Insertion Loss	≤0.30dB	≤0.30dB
Return Loss	≥25.0dB	≥35.0dB
Operating Temperature	-40℃~75℃	
Storage Temperature	-40℃~85℃	

HJ3•W Inc			
D/N.	SSP-MTP(M)-6DLC-G3-3-2YL		Rev.
SPEC.	Patchcord: MTP/PC(M)-LC/UPC MM OM3 12 Cores 250um OD3.0mm LSZH Yellow L=3.2M		A
DRAWN BY	Jianzheng Zhu	CHECK BY	Ming Li
APPD. BY	Aiqing Li	CUSTOMER	
SHEET	X/P	SCALE	NONE
DATE	2017-04-11	VIEW	

FM04-07-04A

2

3

4

5

6